

SpECgrout E60

FILLED EPOXY RESIN GROUT

DESCRIPTION

SpECgrout E60 is a solvent free epoxy based grout designed for gap thicknesses from 12 to 150mm.

TYPICAL USES

SpECgrout E60 is a free-flow grout for use in situations where high dynamic loading is anticipated. It is suitable as a bedding layer for mechanical joint system.

ADVANTAGES

- Resistant to dynamic loading
- Non-shrink ensuring maximum contact area
- High compressive, tensile and flexural strengths
- High strength
- Early strength gain
- Chemically resistant

TECHNICAL DATA

Test method for Typical results @ 20°C ±3

Compressive strength (BS 6319 Part 2)

3 days	65 N/mm ²
7 days	90 N/mm ²

Tensile strength (BS 6319 Part 1)

@ 7 days	16 N/mm ²
----------	----------------------

Flexural strength (BS 6319 Part 3)

@ 7 days	36 N/mm ²
----------	----------------------

Pot life

20°C	100 mins
30°C	50 mins
40°C	25 mins

CHEMICAL RESISTANCE

SpECgrout E60 are resistant to mild acids, alkalis, sea water, oil, greases, fresh and sea water and most common chemicals.

APPLICATION INSTRUCTIONS

Preparation

All substrates should be sound and free from oils and greases and must be dry. Concrete surfaces must be scabbled or grit blasted to a sound base. Dust and debris must be removed.


Steel surfaces, particularly the underside of base plates, should be grit blasted to clean bright metal.

Baseplate Grouting

Formwork

Formwork must be constructed which is leak proof and be similar to that shown in the sketch below:


For successful grouting it is essential to provide a hydrostatic head of grout. To achieve this a feeding hopper system should be used similar to that shown in the sketch below:

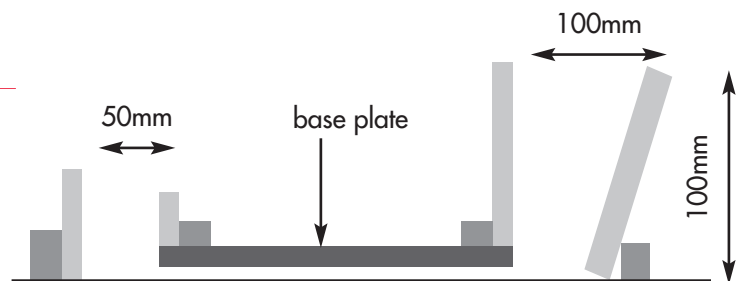

Cross section of typical grouting formwork

Mixing

SpECgrout E60 is supplied in a three-component pack consisting of one tin of resin, one tin of hardener and one bag of specially selected fillers.



the base and hardener should be first mixed together in a 25 litre steel container and the powder component added slowly while mixing with a slow speed drill and paddle.

Complete mixing will take at least 3 minutes.

